


**Lumos LiFePO4 Battery HP-CT-0AH Specification**

Basic Information

Nominal Voltage	3.2V
Nominal Capacity @23°C/77°F	180AH @C/3 Discharge
Available Capacity @23°C/77°F	≥ 98% at 1C Discharge
	≥ 95% at 2C Discharge
	≥ 90% at 3C Discharge
Specified Volumetric Density (C/3, 23°C/77°F)	152.90Wh/L
Specified Gravimetric Density (C/3, 23°C/77°F)	99.80Wh/Kg
Specific Power (23°C/77°F)	499W/Kg @ 15 sec; 299W/Kg (continuous)
Internal Resistance	≤ 1mΩ
Cycle Life (23°C/77°F)	2000 times @80% DOD
	1000 times @100% DOD
Dimensions (L x W x H) Include terminals & Bus Bar	183 x 72 x 286 mm (7.20 x 2.83 x 11.2 inch)
Weight ( Include terminals & Bus Bar)	5.77Kg/12.72lbs
Bolt Type	M14
Pole Distance (mm)	100 mm

Picture & Drawings

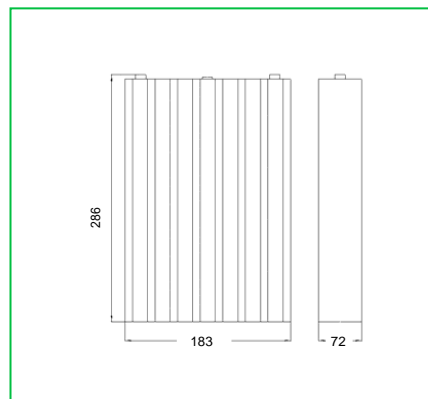

Advantages:

- Long Cycle Life
- No Memory Effect
- High C-Rate Charging & Discharging Capability
- Great DOD Peak Power
- Excellent High & Low Temperature Performances
- Environmental Friendly
- Safe

## Charge Methods (@ 23°C/77°F)

Charge Voltage	3.65V
Cut-off Voltage	3.85V
Charge Mode	CC/CV (3.65V)
Standard Charge Current	60.0A (C/3)
Max. Continuously Current in CC Charge State	≤ 180A (1C) @0~90% SOC
Peak Charge Current	≤ 360A (2C) @0~80% SOC
Balance Time in CV State	1~2 hours
Float Charge Current	3.40V

## Discharge Methods (@ 23°C/77°F)

Discharge Voltage	3.20V @ C/2 Discharge
End Voltage	2.50V
Standard Discharge Current	60.0A (C/3)
Max. Continuously Current	540A (3C)
Peak Discharge Current	
Peak Discharge Current for 5 seconds	≤ 1440A (8C)
Peak Discharge Current for 15 seconds	≤ 900A (5C)
Peak Discharge Current for 60 seconds	≤ 900A (5C)
Self-discharge Rate	3% (Monthly)

## Temperature Characteristics

Working Temperature	Charge	0~45°C/32~113°F
	Discharge	-20~60°C/-4~140°F
Storage Temperature	1 Month	-20~60°C/-4~140°F
	3 Months	-20~45°C/-4~113°F
	6 Months	-20~25°C/-4~77°F
Water/Dust Resistance	IP67	
Atmospheric Pressure	86~106Kpa	
Operation Humidity	25~85%, Non-condensing	

Approved by   