





SE70AHA

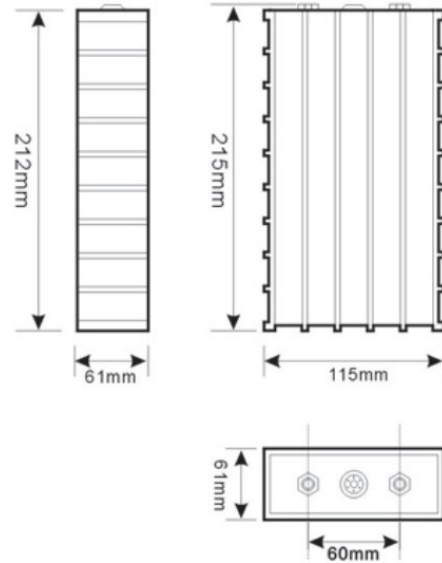

MODEL	SE70AHA		
Nominal Capacity / impedance	70Ah / 2 ohms		
Operating Voltage	Charge	3.6V	
	Discharge	2.0V	
Max Charge Current	≤3CA		
Max Discharge Current	Constant Current	≤4CA	
	Impulse Current	≤12CA	
Standard Charge/Discharge Current	0.3CA		
Cycle Life	80DOD%	≥2000Times	
	70DOD%	≥3000Times	
Temperature Durability Of Case	≤170℃	Long Temperature Durability	≤140℃
Operating Temperature	Charge	0℃ ~ 55℃	
	Discharge	-25℃ ~ 55℃	
low temperature discharge rate @ -20℃	> 80%		
Self-discharge Rate	≤3%(Monthly)		
Weight	2.5 kg±0.1kg		

DISCHARGE AT TEMPERATURE OF -20°C

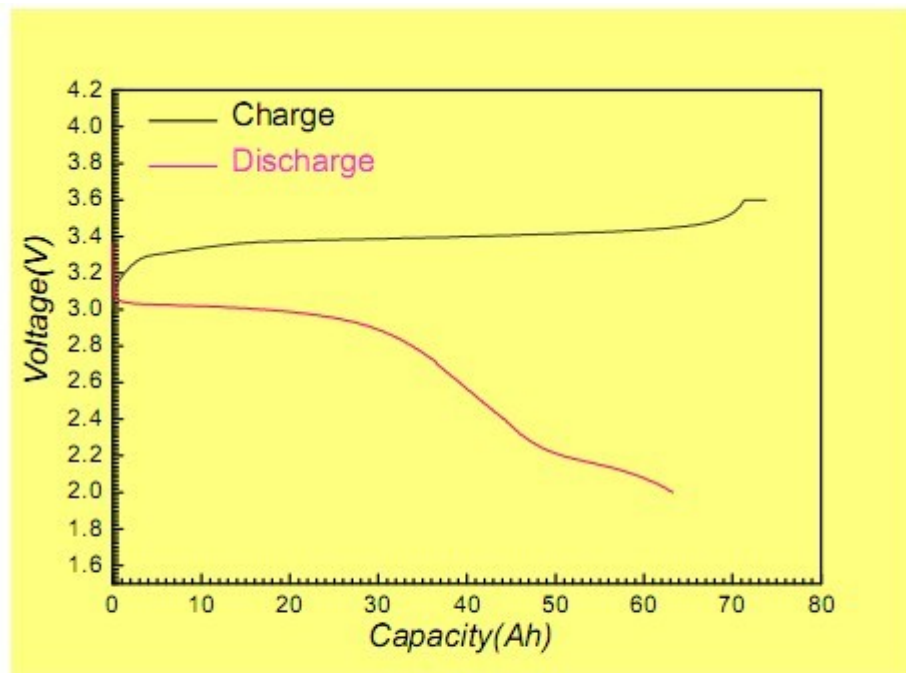

Charge: CC(18A)/CV(3.6V) to 1.8A @ 20°C

Discharge: CC(18A) to 2.0V @ -20°C

Discharge capacity in the proportion of 20°C : 85.8%